

MTD2007F SPECIFICATION

Absolute maximum rating(Ta=25deg)

Parameter	Symbol	Ratings	Unit
Logic supply	VCC	0 ~ 6	V
Logic input	Vpha,I0,I1	0 ~ VCC	V
Reference Input	Vref	0 ~ VCC	V
Voltage	VCEO(SUS)	50	V
Diode voltage	VR	50	V
Output current	IC	1	A
Diode current	IF	1	A
Storage temperature	Tstg	(-40~150)	deg
Junction temperature	Tj	150	deg

Recommended operating condition


Parameter	Symbol	MIN	TYP	MAX	Unit
Logic Vcc	Vcc	4.5	5	5.5	V
Motor voltage Vmm	Vmm	10	-	45	V
Operating temperature	Tj,op	-25	-	120	DEG

Electric Characteristics(Ta=25deg)

Parameter	Symbol	Conditions	MIN	TYP	MAX	Unit
Logic supply crrnt	Icc(ON)	Vcc=5V	-	35	47	mA
	Icc(OFF)	Vcc=5V,V(I0,I1)=5V	-	30	42	mA
Output stage supply current ImmA+B	Imm(OFF)	Vcc=5V,V(I0,I1)=5V,Vmm=45V	-	-	10	mA
Phase input voltage	V INH	Vcc=5V	2.70	-	Vcc	V
	V INL	Vcc=5V	GND	-	0.80	V
Phase input current	I INH	Vcc=5V,VIN=5V	-	-	10	uA
	I INL	Vcc=5V,VIN=0V	-	-1	-10	uA
I0,I1 input voltage	V(I0,I1)H	Vcc=5V	2.70	-	Vcc	V
	V(I0,I1)L	Vcc=5V	GND	-	0.80	V
I0,I1 input current	I(I0,I1)H	Vcc=5V,V(I0,I1)=5V	-	-	10	uA
	I(I0,I1)L	Vcc=5V,V(I0,I1)=0V	-	-2	-10	uA
Reference(Vref) input current	Iref	Vcc=5V,Vref=0V	-	-1	-10	uA
Sence input current	Isense	Vcc=5V,Vs=0V	-	-1	-10	uA
Comparator threshold(100%)	Vs1	Vcc=Vr=5V,V(I0)=0V,V(I1)=0V	0.475	0.5	0.525	V
Comparator threshold(70%)	Vs2	Vcc=Vr=5V,V(I0)=5V,V(I1)=0V	0.322	0.35	0.378	V
Comparator threshold(40%)	Vs3	Vcc=Vr=5V,V(I0)=0V,V(I1)=5V	0.18	0.2	0.22	V
Upper transistor saturation voltage	Vce(sat)H	Ic=0.8A	-	1.30	1.50	V
Lower transistor saturation voltage	Vce(sat)L	Ic=0.8A	-	1.20	1.40	V
Output leakage current	Ireak	Vmm=Vceo(sus)V	-	-	10	uA
Upper diode forward drop	VF H	If=0.8A	-	1.40	1.60	V
Lower diode forward drop	VF L	If=0.8A	-	1.30	1.50	V
Chopping frequency	fchop	Vcc=5V,Ct=4700pF,Rt=16kohm	-	20	-	kHz
Blanking time	tb	Vcc=5V,Ct=4700pF,Rt=16kohm	-	2.5	-	uS
Maximam sensing voltage	Vs(max)	Vcc=5V	-	-	1.00	V
Thermal shutdown temperature		Vcc=5V	-	150	-	deg

				MANAGER	Type Name:	
				T. Wakabayashi	MTD2007F	
1	Oct.12.1998	Y.I	Newly	CHKD	Code No:	
				T. Ogino	4002	
SHINDENGEN ELECTRIC MFG.CO.,LTD				DEGD	DWG.No:	
JAPAN				Y. Ishida	1SK-97242	
					EDIT	
					-1	

Pin assignment

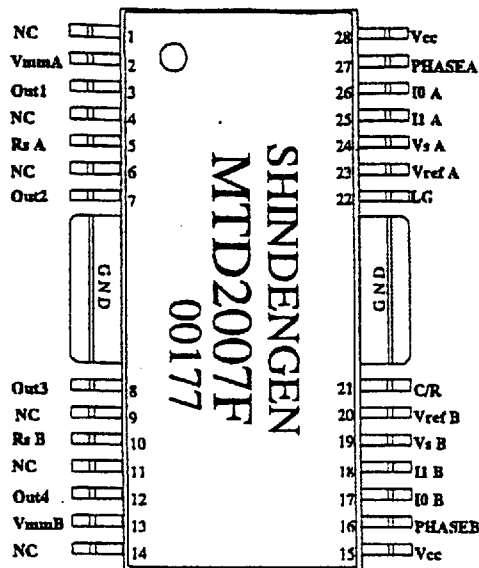

Truth table


I0 A and I1 A or I0 B and I0 B	PHA A or B	OUT 1 or 4	OUT 2 or 3
L	L	L	H
L	H	H	L
H	*	OFF	OFF

* : don't care

Current selection Truth table

I0 A or B	I1 A or B	Output current ratio(%)	Vref (V) (Vr=5V)
L	L	100	0.50
H	L	70	0.35
L	H	40	0.20
H	H	0	

Block Diagram

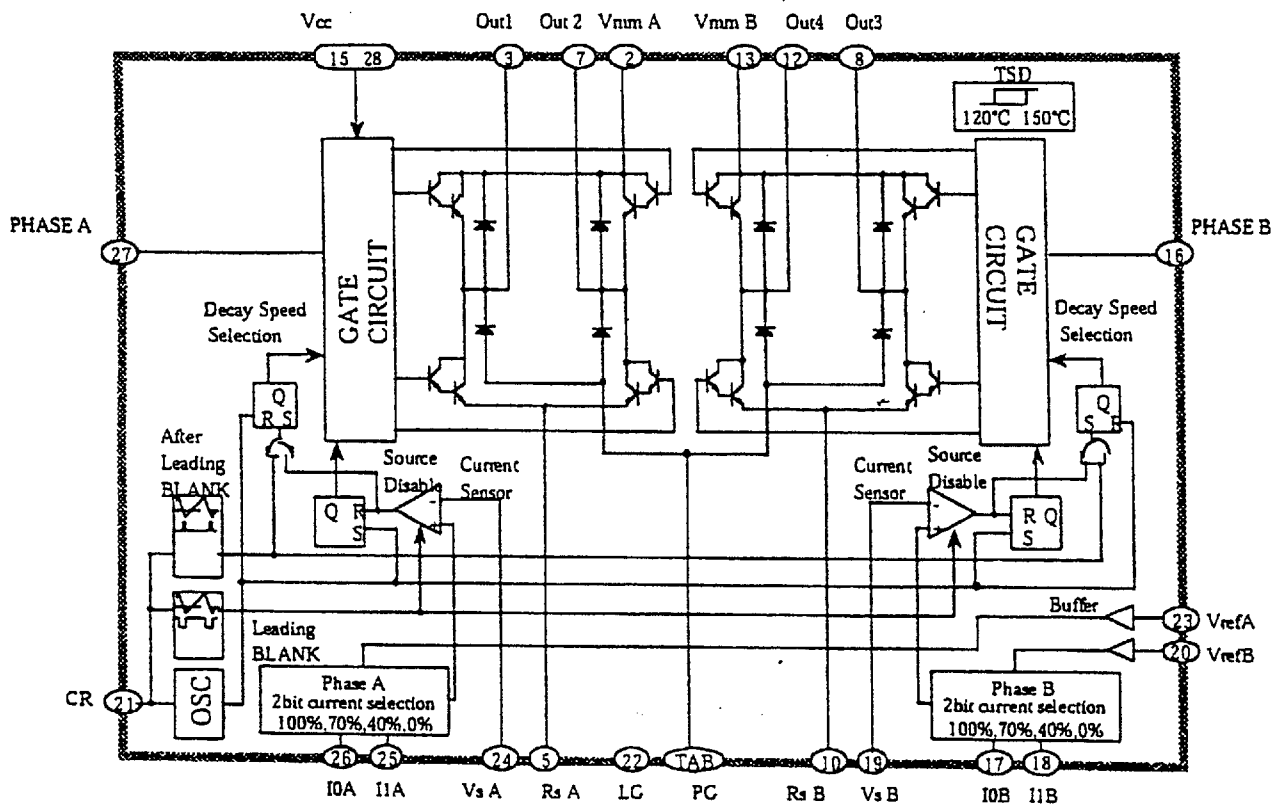


SHINDENGEN ELECTRIC MFG.CO.,LTD
JAPAN

Type Name: MTD2007F

DWG.No: 1SK-97242

- 1 EDIT

*Inside equivalent circuit / application circuitry example

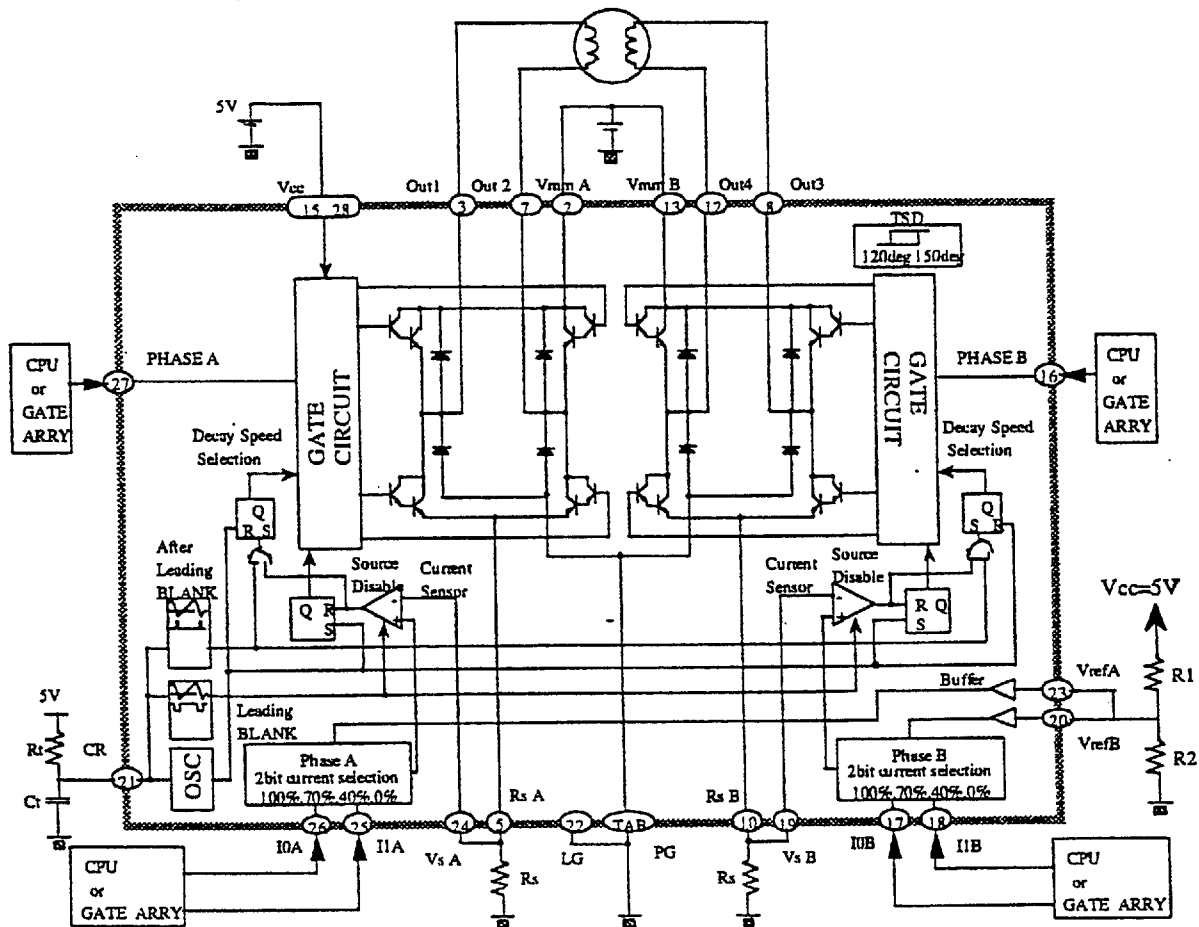

$C_t = 3300\text{pF to } 5800\text{pF}$

$R_t = 10\text{kohm to } 40\text{kohm}$



$R_s = (V_{ref}/10)/I_{out}$

$V_{ref} = 1\text{V to } 5\text{V}$



You can construct fixed current control micro step circuit only by two CR for frequency setting and two resistor for current detection, amounted to 4.

SHINDENGEN ELECTRIC MFG.CO.,LTD JAPAN	Type Name: MTD2007F	
	DWG.No: 1SK-97242	- 1 EDIT
3/4 SHEET		


Mechanical Data of HSOP28 Package (Unit mm)

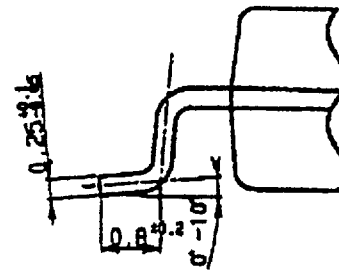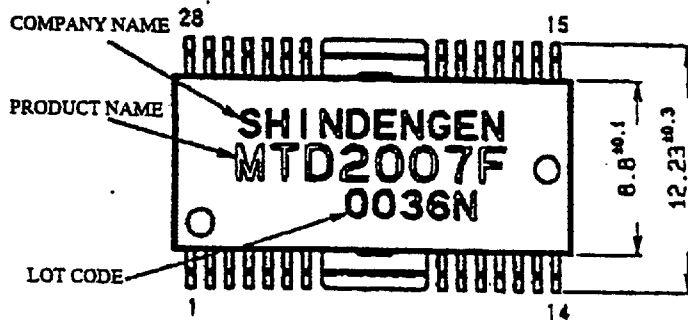

A Part S=12/1

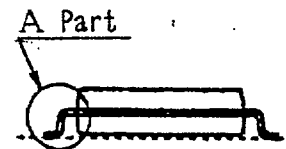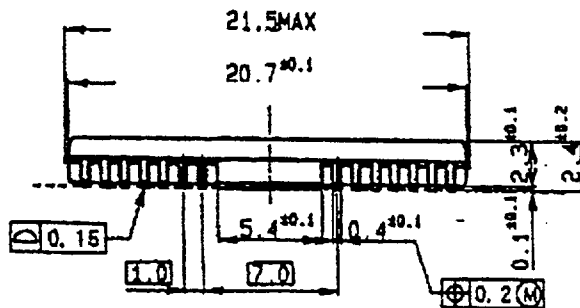

RECOMMENDED SOLDERING PAD PATTERN

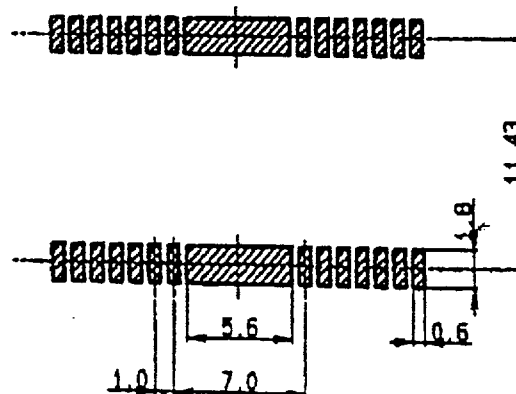

SHINDENGEN ELECTRIC MFG.CO.,LTD JAPAN	Type Name: MTD2007F	
	DWG.No: 1SK-97242	- 1 EDIT
4 / 4 SHEET		